

## Titanium and Zirconium Castings

In 1957, Oregon Metallurgical Corporation (Oremet), Albany, Oregon, built the world's first titanium casting foundry. In 1991, Oremet and Wah Chang, a reactive metals manufacturer, collaborated on a project that produced what was then the world's largest cast zirconium pump casing for severe-service CPI equipment. Today, Oremet (now called Allvac-Oremet) is a sister company of Wah Chang (both are subsidiaries of Allegheny Technologies, Inc. (ATI)), and is still the world leader in rammed-graphite, titanium and zirconium castings.

Wah Chang is the sales agent for titanium and zirconium castings produced at the Allvac-Oremet, Albany, Oregon facility.

### Contact information:

#### Bill Budd

Manager Business Development

Casting Services

Phone: 541-967-6947

Fax: 724-453-3353

[bill.budd@wahchang.com](mailto:bill.budd@wahchang.com)

#### Mike Wilcox

Inside Sales, Castings

Phone: 541-967-6932

Fax: 541-967-6979

[mike.wilcox@wahchang.com](mailto:mike.wilcox@wahchang.com)



**Figure 1:** Zirconium Fabricated Pump Case



**Figure 2:** Titanium End Piece and Titanium Valve Body




**Figure 3:**Zirconium Valve Body



**Figure 4:**Titanium Flanged Elbow

## CORROSION-RESISTANT

Both titanium and zirconium are unusually resistant to corrosive attack and virtually immune to many oxidizing and reducing environments. This is due primarily to a tenacious oxide film that is formed when titanium and zirconium are exposed to the atmospheres. By combining titanium with small amounts of palladium or molybdenum and nickel, its corrosion-resistant properties can be expanded.

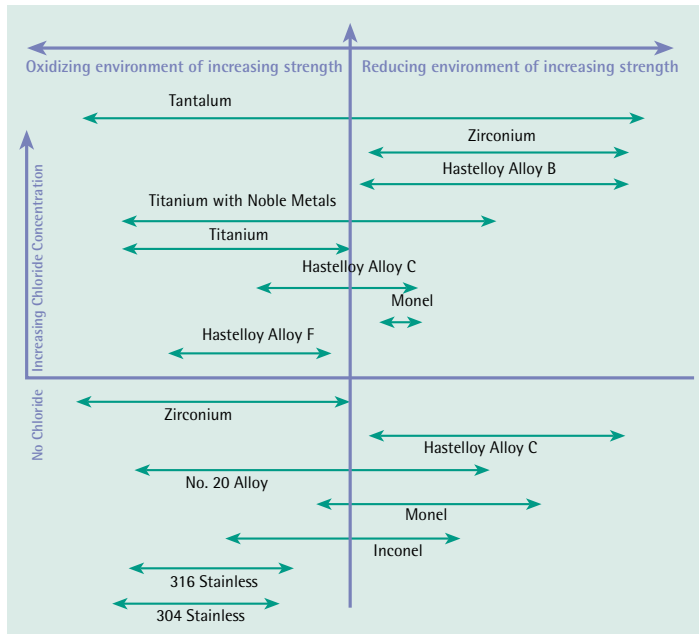

## SPECIFYING

### When to specify:

Titanium is ideally suited for the following environments:

- Wet chlorine gas
- Solutions containing chlorine
- Hypochlorous acid
- Hypochlorites
- Nitric acid
- Calcium chloride
- Sea water and fresh water

In these destructive environments, titanium will usually last many times longer than stainless steel. Although the initial outlay is greater, titanium often proves more economical than stainless steel on a life cycle basis.

Since some of the early titanium castings have yet to be replaced, there is no way to know just how long they may last.

Zirconium performs especially well in the following environments:

- Hydrochloric acid
- Sulfuric acid
- Caustics
- Organics and Organic acids
- Nitric acid
- Acetic acid
- Formic acid

Since most corrosive environments are not covered by simple cases, testing is recommended. Wah Chang maintains a complete test laboratory to assist you in corrosion testing and material selection.

### Allvac-Oremet Castings Available:

Titanium, zirconium and their alloys are cast centrifugally or static depending upon shape and size.

## TOLERANCES

### Dimensional tolerances:

Minimum section thickness: 3/16 inch; 1/8 inch if less than 1 inch in any 1 square inch.

### Base Tolerances:

- Up to one linear inch  $\pm 1/32$  inch
- 1 inch up to 10 inches  $\pm 1/16$  inch
- 10 inches up to 20 inches  $\pm 1/8$  inch
- 20 inches up to 60 inches  $\pm 3/16$  inch

Added tolerance for dimensions across the parting line:  $\pm 1/8$  inch

Added tolerance for dimensions across the parting line and parallel to the parting line (mismatch):

- $\pm 1/16$  inch less than 10 inch
- $\pm 1/8$  inch 10 inch and above

## TYPICAL PRODUCT APPLICATIONS

- Pollution control
- Valve sets
- Impellers
- Marine hardware
- Hydrofoil components
- Oceanographic instrument housings
- Seaballs (for oceangoing submarine valves)
- Pump sets
- Anodes
- Agitators and mixers
- Logging equipment
- Special purpose equipment
- Defense components

## DESCRIPTION

### Radium Dimensions:

- Sharp to 1/8 inch radius +1/32 inch
- 1/2 inch fillet radius +1/32 inch

Patterns constructed by Allvac-Oremet  
will typically have:

### Finish Stock:

3/16-1/4 inch on all machined surfaces

### Maximum Weights:

Allvac-Oremet castings are produced over a weight range of 1 lb. to 1,300 lbs. in titanium. Zirconium castings can be produced in any size up to 1,800 lbs. Larger castings can be produced by fabricating several castings into a single component. \*In certain configurations casting weights in excess of this figure are possible but must be evaluated on a case-by-case basis.

### Pattern Equipment:

Standard loose or match-plate patterns, either wood or metal. Standard core boxes except those designed for core blowing only. Most patterns for ferrous and nickel based alloy conform dimensionally. Pattern modifications or new construction can be accommodated through a local state-of-the-art pattern shop. Generally, pattern equipment designed for sand casting processes can be utilized with modifications to gating and riser systems.

**PROPERTIES OF ALLVAC-OREMET CASTINGS**

	<b>COMMERCIALY PURE TITANIUM ASTM B367-93 OMC 105 GR C3</b>	<b>PALLADIUM STABILIZED TITANIUM ASTM B367- 93 OMC 105 GR TiPd8A</b>	<b>TITANIUM 6Al-4V ASTM B367-93 OMC 105 GR C5</b>	<b>COMMERCIALY PURE ZIRCONIUM ASTM B752-97 OMC 302 GR 702C</b>	<b>Ti-12 Grade 12</b>	<b>ZIRCONIUM ASTM B752- 97 OMC 302 GR 705C</b>
CARBON (MAX.)	0.10	0.10	0.10	0.10	0.10	0.1
HYDROGEN (MAX.)	0.0150	0.0150	0.0150	0.005	0.015	0.005
NITROGEN (MAX.)	0.05	0.05	0.05	0.03	0.05	0.03
OXYGEN (MAX.)	0.40	0.40	0.40	0.25	0.40	0.3
IRON (MAX.)	0.25	0.25	0.25	0.30	0.30	0.3
ALUMINUM (MAX.)	-	-	5.5-6.75	-	-	-
VANADIUM (MAX.)	-	-	3.5-4.5	-	-	-
PALLADIUM (MIN.)	-	0.12	-	-	-	-
OTHERS (MAX.)	0.40	0.40	0.40	0.40	0.40	0.40
TENSILE STRENGTH (MIN.)	65 ksi	65 ksi	130 ksi	55 ksi	80 ksi	70 ksi
YIELD STRENGTH (MIN.)	55 ksi	55 ksi	120 ksi	40 ksi	50 ksi	50 ksi
ELONGATION (MIN.)	12%	12%	6%	12%	10%	12%
BRINELL HARDNESS	235	235	365	210	235	235

Other Common Grades: C-2 and C-7B

## PROPERTIES OF ALLVAC-OREMET CASTINGS AND CASTING

### Class I:

Casting dimensions are a product of the customer supplied pattern. No dimensional inspection of the pattern or the casting is performed.

### Class II:

Dimensional inspection of the customer supplied pattern is performed. Recommended pattern modifications are quoted as necessary to ensure the casting produced by the pattern will result in a dimensionally acceptable casting based on customer supplied drawing requirements.

### Class III:

Wah Chang will quote and provide the pattern equipment and inspect to ensure the castings produced by the pattern will be dimensionally acceptable based on customer supplied drawing requirements. A first article casting layout will be performed on the initial casting from this pattern.